




FLEXnet™ DC


Advanced DC System Monitor

- Easily Watch What Your DC System Is Doing
- Extends Your System's Battery Life
- Reduces Generator Run-Time/Fuel-Consumption
- Provides Battery State-of-Charge Level
- Monitors Energy Production and Consumption
- Improves System Performance and Efficiency
- Simple Installation and Setup
- Provides 128 Days of System Data Logging

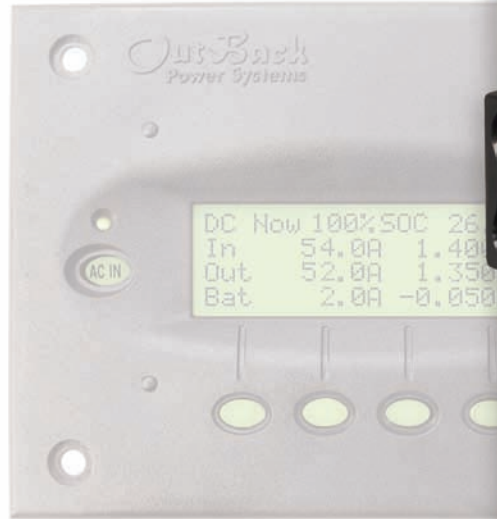


FLEXnet™ DC
(MATE required, not included)


The OutBack Power Systems FLEXnet™ DC is the ultimate in DC System monitoring devices. Our integrated networked communications make valuable, usable data available from your system, viewable on an OutBack MATE communications device (screens seen below), providing you with the answers you need concerning your system's health, performance and efficiency.



Battery Status Screen - Easily see your system's current condition with this at-a-glance display. This screen shows an easy to interpret "fuel gauge" style status bar, current state-of-charge and whether you are currently charging or discharging your batteries. This is useful for those system owners who want a way to quickly understand the current state of their battery bank.



Now Summary Screen - Monitor the amount of power your system is currently producing and consuming as well as the amount of power going IN and OUT of your battery bank. This screen also displays your battery bank's voltage and current state-of-charge, providing you with real-time production monitoring of DC sources, such as a solar array or small wind turbine, as well as consumption by loads.



Today Summary Screen - Monitor the cumulative energy your system has produced and consumed as well as the total amount of energy that has gone to charging your batteries today. This screen also displays today's lowest state-of-charge and allows you to see how your overall system production compares to system consumption.



History Summary Screen - Review historical energy production/consumption data for the most recent 128 days, including the minimum battery state-of-charge reached for each day. This screen can be used to watch power system production and consumption trends.

OutBack POWER
www.outbackpower.com


FN-DC Specifications

Battery Voltage Input Range	8.0 to 80.0 Volts DC	
Battery Voltage Resolution	0.1 Volts DC	
Number of Current Channels	One to Three (each can be a Source or Load)	
Current Range (Each Channel)	-1000.0 Amps to +1000.0 Amps DC	
Current Resolution	0.1 Amps DC	
State of Charge Display	0 to 100% (1% increments)	
Aux Relay Configuration	SPST, Magnetic Latching Relay	
Aux Relay Max Rating	5 Amps @ 30 Volts DC	
Current Shunt Type (order separately)	500 Amp / 50mv	
Display	Primary	MATE or MATE2 4 x 20 LCD
	Secondary	Five LED Indicators on front of FLEXnet DC
Battery AH Capacity Range	100 to 10,000 Amp Hours	
Data Logging Memory	Most recent 128 Days	
Programmable AUX Relay Settings	Battery Volts	Adjustable from 8.0 to 80.0 VDC
	State of Charge	Adjustable from 0 to 100%
	Time Delay	Adjustable from 0 to 240 Minutes
Accuracy	0.5% of Reading +/- 2 LSDs per channel	
Operating Temperature Range	0 - 50°C (32 - 122°F)	
Mounting	3/4" Panel Mount Breaker Slot or Surface Mount using Built-in Mounting Bars	
Warranty	Standard 2 year	
Weight	Unit	5 oz. (.14kg)
	Shipping	2 lbs. (.91 kg)
Dimensions (H x W x L)	Unit	0.7 x 3.7 x 6.6" (1.9 x 16.8 cm)
	Shipping	2.1 x 9.0 x 11.5" (5.4 x 22.9 x 29.2 cm)

*Specifications subject to change without notice

Additional Available Data

- Battery Amps
- Average Battery Amps
- Average Battery Volts
- DC Amp Per Shunt IN
- DC Amp Per Shunt
- kWDC Per Shunt
- kWDC OUT Per Shunt
- Cycle Amp Hours
- Cycle Watt Hours
- Cycle Amp Hour Charge Factor
- Cycle Watt Hour Charge Efficiency
- Total NiDAYS Full
- Cumulative Battery Amp Hours Removed

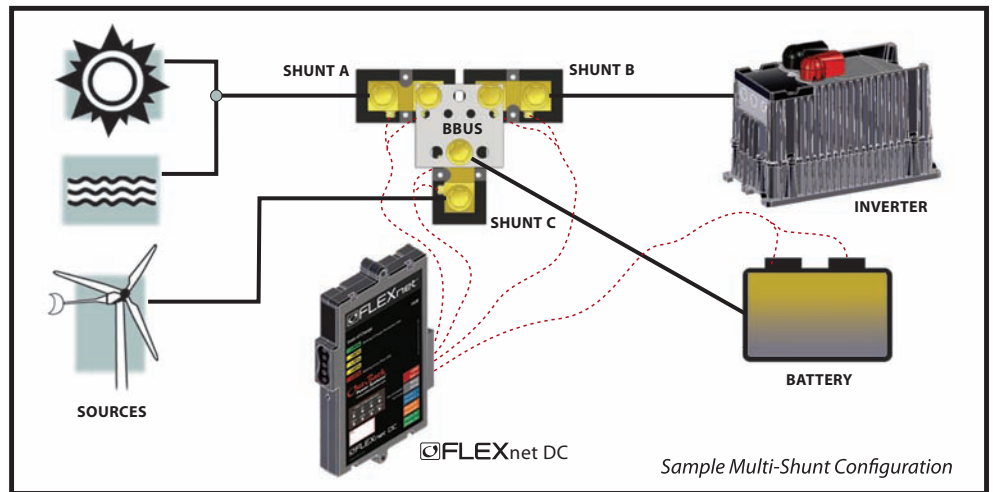

Main Office:
 19009 62nd Avenue NE
 Arlington, WA 98223 USA
 Phone: (360) 435.6030
 Fax: (360) 435.6019

European Office:
 BARCELONA, España
 Phone: +34.93.654.9568

www.outbackpower.com

Distribuidor:



www.coltecnica.com
 (571) 4737687
colsolar@coltecnica.com
 Bogotá - Colombia

980-0017-01-00 REV B